


Pressure switch PiezoSwitch PS

measuring, displaying, switching

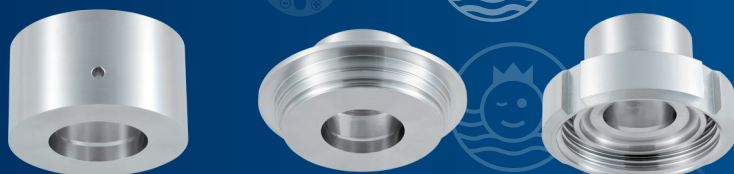

Flexible and functional pressure switch / transmitter PiezoSwitch

Features

- output signal 4...20mA, 2 wire
- max. 2 PNP-switching outputs, 24V DC, max. 50mA, with indicator for switching status
- LED-display for measurement reading
- easy configuration and operating modus with 3 buttons
- menu-driven configuration on site
- free programmable measuring ranges from -1/0 up to 30bar, TurnDown 4
- process connections
G1" elastomer-free sealing cone, turnable or EHEDG EL-ASEPTIC certified modular system PZM, with more than 20 different process connection adapters and weld-in sockets

Superior housing

- HIGH-SAFE housing in hygienic design
- resistant to temperature and pressure overload, suitable for CIP- and SIP-processes

Applications

- measurement and monitoring of absolute and gauge pressure in pipes
- reliable switching functionality
- suitable for fluids and gases, process temperature -40°C up to 125°C / 140°C 1 h

PS – STRONG IN TECHNOLOGY AND PRICE!



TYPE EL - ASEPTIC CLASS I
JUNE 2011



Hengesbach GmbH & Co. KG

Schimmelbuschstr. 17
D-40699 Erkrath · Germany

Phone +49 (0) 21 04 / 30 32-0
Fax +49 (0) 21 04 / 30 32-22

E-Mail: info@hengesbach.com

www.hengesbach.com